
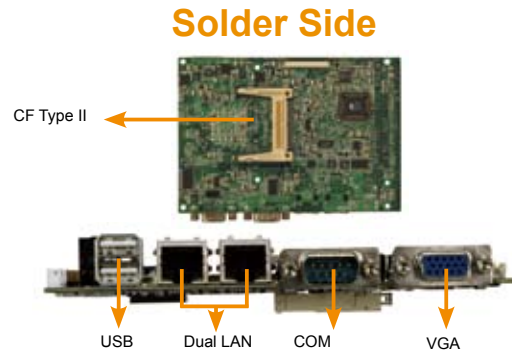


WAFER-GX

3.5" SBC with AMD® Geode™ GX466 333MHz CPU,
Dual LAN, SATA, VGA/LVDS/TTL and Audio

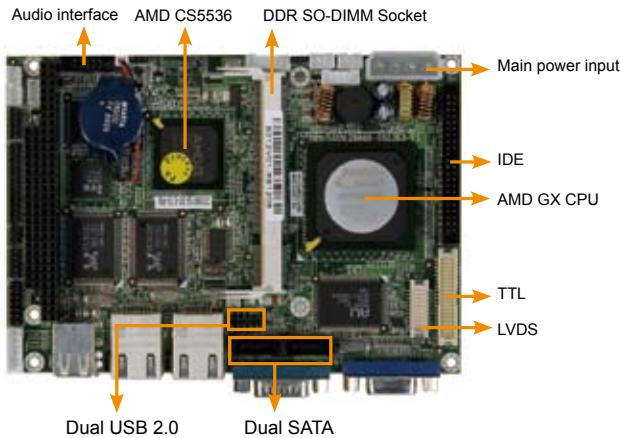

Specifications

- ◆ CPU
 - On board AMD® Geode™ GX466(333MHz) processor
- ◆ System Chipsets
 - AMD® Geode™ GX466 + CS5536
- ◆ BIOS
 - Award BIOS
- ◆ System Memory
 - One 200-pin 266/200MHz DDR SDRAM DIMM supported (system max. 512MB)
- ◆ Ethernet
 - 10/100Mbps dual RTL8100C Ethernet chipsets
- ◆ I/O Interface
 - 4 x USB 2.0
 - 2 x SATA with ALI M5283 RAID 0,1 function support
 - 1 x LPT
 - 1 x CF Type II
 - 2 x RS-232
 - 1 x RS-422/485
 - 1 x PS/2 for KB/MS
 - 1 x IDE
- ◆ Expansions
 - 1 x PC/104
- ◆ Digital I/O
 - 8-bit digital I/O, 4-bit input/ 4-bit output
- ◆ Super I/O
 - W83627EHG
- ◆ Audio
 - Realtek ALC203 with AC'97 Codec
- ◆ Display Interface
 - VGA integrated in AMD® GX466
 - 24-bit TTL
 - 18-bit single channel LVDS
- ◆ Watchdog Timer
 - Software programmable supports 1-255 sec. system reset
- ◆ Power Supply
 - 5V only, AT/ATX support
- ◆ Power Consumption
 - 5V@1.15A
 - (AMD® GX466, DDR266MHz/ 256MB HCT11.2)
- ◆ Temperature
 - Operating: 0° to 60°C
- ◆ Humidity
 - Operating: 5% to 95%,
- ◆ Dimensions
 - 146 mm x 102 mm
- ◆ Weight
 - GW: 670 g; NW: 230 g


Packing List

1 x WAFER-GX Single Board Computer
1 x ATA33 Flat Cable (P/N: 32200-000009-RS)
2 x SATA Cable (P/N: 32000-062800-RS) (WAFER-GX-466S only)
1 x SATA Power Cable (P/N: 32100-088600-RS) (WAFER-GX-466S only)
1 x RS-232 Cable (P/N: 32200-000049-RS)
1 x RS-232/422/485 Cable (P/N: 32200-026500-RS)
1 x KB/MS Y Cable (P/N: 32000-023800-RS)
1 x Mini Jumper Pack (P/N: 33100-000033-RS)
1 x Audio Cable (P/N: 32000-072100-RS)
1 x QIG
1 x Utility CD

Features

1. AMD® GX466 333MHz and RoHS compliant
2. DDR266MHz SO-DIMM socket support up to 512MB
3. Dual 10/100Mbps RTL8100C Ethernet chipsets
4. SATA, USB 2.0, CF Type II, LPT and COM port

Dimensions (mm)

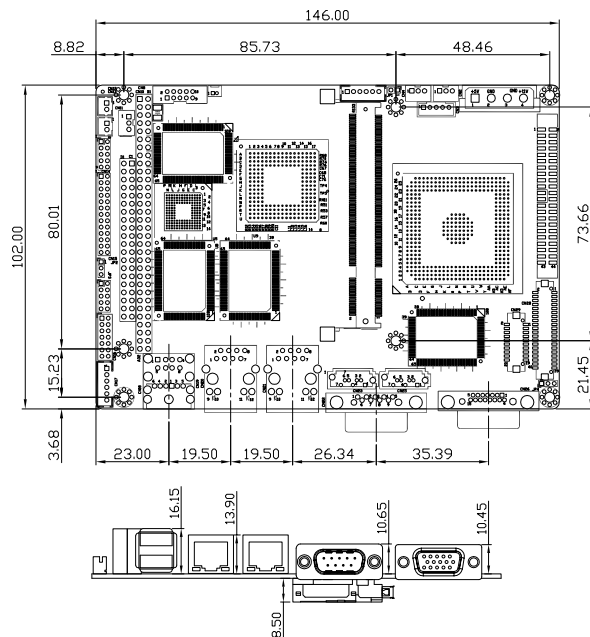

Ordering Information

Part No.	Description
WAFER-GX-466-R10	3.5" SBC with AMD® GX466 333MHz CPU, VGA/LVDS/TTL, Dual LAN, USB 2.0 and Audio
WAFER-GX-466S-R10	3.5" SBC with AMD® GX466 333MHz CPU, VGA/LVDS/TTL, Dual LAN, SATA, USB 2.0 and Audio
WAFER-GX-CE050	Windows®CE5.0 Image & BSP SW CD, Licensed Sticker (W/O CPU Board)
WAFER-GX-XPE	Windows®XP Embedded Image & SLD S/W CD, Licensed Sticker (W/O CPU Board)
32000-070300-RS	USB Cable
32200-015100-RS	LPT Cable